


Specifications

MODELS	SLC™-12		SLC™-18		SLC™-24	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height:						
standard forks - forks down	3.40 m	11 ft 2 in	5.10 m	16 ft 9 in	6.78 m	22 ft 3 in
standard forks - forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
adjustable forks - forks down	3.40 m	11 ft 2 in	5.10 m	16 ft 9 in	6.78 m	22 ft 3 in
adjustable forks - forks up	3.94 m	12 ft 11 in	5.64 m	18 ft 6 in	7.32 m	24 ft
boom**	3.70 m	12 ft 2 in	5.41 m	17 ft 9 in	7.10 m	23 ft 3 in
A Height - stowed	2.18 m	7 ft 2 in	2.18 m	7 ft 2 in	2.18 m	7 ft 2 in
B Length - stowed	86 cm	2 ft 10 in	86 cm	2 ft 10 in	86 cm	2 ft 10 in
C - operating	1.60 m	5 ft 3 in	1.85 m	6 ft 1 in	2.06 m	6 ft 9 in
D Width - stowed*	80 cm	2 ft 7.5 in	80 cm	2 ft 7.5 in	80 cm	2 ft 7.5 in
- with stabilisers lowered	1.68 m	5 ft 6 in	1.68 m	5 ft 6 in	1.68 m	5 ft 6 in

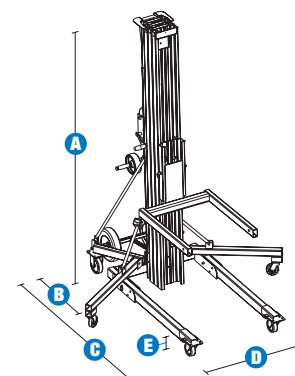

PRODUCTIVITY						
Load capacity:						
36 cm (14 in) load centre	295 kg	650 lbs	295 kg	650 lbs	295 kg	650 lbs
61 cm (24 in) load centre	193 kg	425 lbs	193 kg	425 lbs	193 kg	425 lbs
1.07 m (42 in) load centre	82 kg	180 lbs	73 kg	160 lbs	73 kg	160 lbs
E Ground clearance	5 cm	2 in	5 cm	2 in	5 cm	2 in
Load height minimum	15 cm	6 in	15 cm	6 in	15 cm	6 in

POWER						
Average cranks:						
standard winch	27.8 cranks/m	8.5 cranks/ft	27.8 cranks/m	8.5 cranks/ft	27.8 cranks/m	8.5 cranks/ft
two speed winch, high	13.1 cranks/m	4 cranks/ft	13.1 cranks/m	4 cranks/ft	13.1 cranks/m	4 cranks/ft
two speed winch, low	49.2 cranks/m	15 cranks/ft	49.2 cranks/m	15 cranks/ft	49.2 cranks/m	15 cranks/ft

WEIGHT						
	102 kg	225 lbs	139 kg	307 lbs	157 kg	347 lbs

LOAD HANDLING ATTACHMENTS						
MEASUREMENTS	Metric		US		Weight - Metric	Weight - US
Standard forks (l/w/d)***	71/58/6 cm	28/23/2.5 in			12 kg	26.5 lbs.
Adjustable forks (l/w/d)***	70/30-76/6 cm	27.5/12-30/2.5 in			24 kg	52.5 lbs.
Fork extensions detached (each) (l/w/d)***	76/5/8 cm	30/2/3 in			2 kg	4.5 lbs
Fork extensions attached (each) (l/w/d)***	64/5/8 cm	25/2/3 in			2 kg	4.5 lbs
Boom (l/w/d)***	46-107/4/15 cm	18-42/1.5/6 in			18 kg	39.9 lbs
Pipe cradle (l/w/d)***/*	69/61/15.2 cm	27/24/6 in			4.5 kg	10 lbs
Load platform (l/w/d)***	67/58/6 cm	26.3/23/2.5 in			14 kg	31.5 lbs

* Outside dimensions.
 ** Measured from ground to bottom of shackle.
 *** Length/Width/Depth.
 **** Handles round objects up to 76 cm (30 in) in diameter.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Boom
- Standard forks
- Adjustable forks
- Fork extensions
- Pipe cradle
- Load platform

POWER OPTIONS

- One speed winch
- Two speed winch

BASE OPTIONS

- Standard base
- Stabiliser set

STANDARD FEATURES

MEASUREMENTS

SLC™-12

- 3.94 m (12 ft 11 in) maximum working height
- Up to 295 kg (650 lb) lift capacity

SLC™-18

- 5.64 m (18 ft 6 in) maximum working height
- Up to 295 kg (650 lb) lift capacity

SLC™-24

- 7.32 m (24 ft) maximum working height
- Up to 295 kg (650 lb) lift capacity

PRODUCTIVITY

- Standard forks
- Heavy-duty design
- Strong, lightweight aluminium telescoping mast
- Single door access
- Quick set up requires no tools
- Interchangeable load handling attachments
- Non-marking 10 cm (4 in) front casters and 13 cm (5 in) rear casters with side brakes
- Rear transport wheel assembly
- Glide rails allow easy loading and unloading, on or off a vehicle, for transport

STANDARD FEATURES cont.

PRODUCTIVITY cont.

- Hold-down bar secures mast assembly during transport
- Captive stabiliser set (standard on SLC™-18, -24)
- Mast brake

POWER

- One speed winch



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Boom
- Adjustable forks
- Fork extensions
- Pipe cradle
- Load platform
- Stabiliser set (option on SLC™-12)

POWER

- Two speed winch



T: 01332 856 359

E: info@workplatformtd.co.uk

www.workplatformtd.co.uk
sales • leasing • hire • training • support