

# 260MRT

## MINI ROUGH TERRAIN SCISSOR LIFT



**Standard Four-Wheel  
Drive for Terrainability**





**Wider Arm Stack  
for Improved Stability**



**Large, High Capacity  
Work Platform**



# JLG MODEL 260MRT

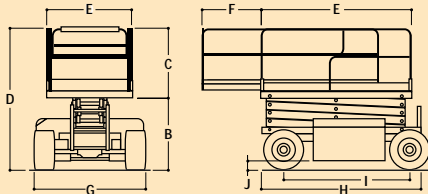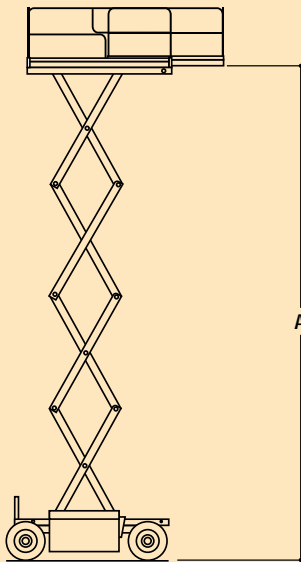

## DIMENSIONAL DATA

A. Platform Height Elevated . . . . .	7.92 m (26 ft.)
B. Platform Height Lowered . . . . .	1.26 m (4 ft. 1.5 in.)
C. Platform Railing Height . . . . .	1.10 m (3 ft. 7.5 in.)
D. Overall Height . . . . .	2.37 m (7 ft. 9.5 in.)
E. Platform Size . . . . .	1.65 x 2.59 m (65 x 102 in.)
F. Platform Extension . . . . .	1.22 m (48 in.)
G. Overall Width . . . . .	1.75 m (5 ft. 9 in.)
H. Overall Length (no outriggers) . . . . .	2.67 m (8 ft. 9 in.)
I. Wheelbase . . . . .	1.98 m (6 ft. 6 in.)
J. Ground Clearance . . . . .	20 cm (8 in.)
Platform Capacity . . . . .	570 kg (1,250 lbs.)
Capacity on Deck Extension . . . . .	140 kg (300 lbs.)
Lift/Lower Speed . . . . .	27/21 sec.
Maximum Drive Height . . . . .	Full Height
Gross Vehicle Weight* . . . . .	3,700 kg. (8,160 lbs)

## CHASSIS

Drive Speed - Lowered . . . . .	5.6 kph (3.5 mph)
Drive Speed - Elevated . . . . .	0.6 kph (0.4 mph)
Gradeability . . . . .	35%
Turning Radius (inside) . . . . .	2.13 m (84 in.)
Tyre Size/Type . . . . .	26 x 12 Lug Tread
Brakes . . . . .	Spring Applied Hydraulically Released

## POWER SYSTEM

Diesel Engine . . . . .	Kubota 905	19.4 kW (26 hp)
Fuel Tank Capacity . . . . .		28.4 L (7.5 gal.)
Hydraulic Reservoir . . . . .		56.9 L (15 gal.)

\*Certain options or country standards will increase weight.

# PERFORMANCE FEATURES

## Standard Features

- Four-Wheel Drive
- 1.65 x 2.59 m (65 x 102 in.) Steel Platform
- 1.22 m (4 ft.) Manual Roll-Out Deck Extension
- Fold-Down Platform Rails
- Removable Platform Control Box
- Proportional Hydrostatic Drive Control with Thumb Steer
- Proportional Lift Up
- 26 x 12 Foam Filled Tyres
- Horn
- Hourmeter
- 3 Degree Slope Alarm and Light
- Descent Alarm
- Lubrication-Free Scissor Arm Bushings

- Scissor Maintenance Prop
- Manual Descent Pull Cable
- Heavy Gauge Steel Chassis Hoods
- Brake and Motor Release for Low-Speed Towing
- Full Swing-Gate

## Available Options

- Platform Work Lights
  - All Motion Alarm
  - Flashing Beacon
  - Alarm Package<sup>1</sup>
  - Hydraulic Leveling Jacks
- <sup>1</sup> Includes flashing beacon and all motion alarm

## Big Performance in a Small Package

Only JLG can put this much performance in such a compact scissor lift. The 260MRT Mini Rough Terrain Scissor Lift delivers exceptional mobility on or off slab thanks to a narrow 1.75 m (69 in.) chassis that fits into tight spaces and standard four-wheel drive that travels 35% grades. Large deck space and large capacity are advantages that make a big difference in productivity!

## Major Advantages

- Standard four-wheel drive with 35% gradeability
- Large, high-capacity operator work platform
- Wider, stronger armstack
- Simplified ground control wiring for ease of service

## The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67 and ANSI A92.6-1999 as originally manufactured for intended applications.

## The JLG Promise

**Whether you rent or own a JLG lift, you can expect the best in terms of safety, reliability, productivity and ease of use for the operator.**



## JLG Industries (Europe)

**A Division of JLG Industries, Inc.**  
 Kilmartin Place, Tannochside Park,  
 Uddingston, G71 5PH, Scotland  
 Tel: 01698 811005  
 Fax: 01698 811055  
 Internet: <http://www.jlg.com>  
 e-mail address: [europe@jlg.com](mailto:europe@jlg.com)

