



JLG E600 SERIES

- Choice of models with up to a working height of 20 m
- Articulating Jib and JibPLUS™ features available for improved positioning
 - On-board generator for quick charging of batteries
- Multiple function operation gets you to the job quicker
- Proportional controls achieve smoother movement for operator comfort
- Low ground bearing pressure for driving on indoor floor surfaces
 - Non-marking all terrain tyres
 - Automatic Traction Control (ATC) for improved manoeuvrability on off-slab areas
- Optional oscillating axle and all wheel drive

For more details check the JLG Technical Specification Guide or ask your local JLG representative.



Automatic Traction Control (ATC) for higher performance

Advanced control system ensures improved traction on uneven surfaces or over floor obstacles.



Oscillating axle and all wheel drive for rough terrain capabilities

Improves wheel contact with the ground when travelling over varying terrain.



Exclusive JibPLUS™ Boom*

Provides a 180 degree range of side-to-side movement in addition to near vertical elevation of 75 degrees for the most versatile positioning capabilities available.

* Models E600JP, M600JP.



Easy to follow layout of controls

Console designed for ease of operation and rapid positioning control.



Multi-Power System

M600, M600J and M600JP models feature an engine-powered generator that automatically recharges the batteries to help reduce downtime.



Operator's Tool Tray

Provides a handy storage area for tools, fasteners and other work materials.



T: 01332 856 359 F: 01332 810 769

E: info@workplatformltd.co.uk W: www.workplatformltd.co.uk

JLGEUROPE

JLG Industries (Europe), A Division of JLG Industries, Inc.
Kilmartin Place, Tannochside Park,
Uddingston, G71 5PH, Scotland.
Tel: 01698 811005
Fax: 01698 811055

www.jlg.com




E600 SERIES ELECTRIC BOOM LIFTS

	E600	M600	E600J	M600J	E600JP	M600JP
Platform Height	18.29 m	18.29 m	18.29 m	18.29 m	18.29 m	18.29 m
Horizontal Outreach	13.13 m	13.13 m	13.06 m	13.06 m	13.23 m	13.23 m
Swing (non-continuous)	400°	400°	400°	400°	400°	400°
Platform Capacity – Unrestricted	230 kg	230 kg	230 kg	230 kg	230 kg	230 kg
Platform Rotator (Hydraulic)	180°	180°	180°	180°	180°	180°
Jib – Overall Length	—	—	1.24 m	1.24 m	1.24 m	1.24 m
Jib - Range of articulation	—	—	141° Vertical (+86° / -55°)	141° Vertical (+86° / -55°)	141° Vertical (+86° / -55°)	141° Vertical (+86° / -55°)
JibPLUS™ - Range of Articulation	—	—	—	—	180° Horizontal	180° Horizontal
A. Platform Size	0.76 m x 1.83 m	0.76 m x 1.83 m	0.76 m x 1.83 m	0.76 m x 1.83 m	0.76 m x 1.83 m	0.76 m x 1.83 m
B. Overall Width	2.44 m	2.44 m	2.44 m	2.44 m	2.44 m	2.44 m
C. Tailswing (working condition)	1.22 m	1.22 m	1.22 m	1.22 m	1.22 m	1.22 m
D. Stowed Height	2.57 m	2.57 m	2.57 m	2.57 m	2.57 m	2.57 m
E. Stowed Length	9.42 m	9.42 m	9.37 m	9.37 m	9.91 m	9.91 m
F. Wheelbase	2.74 m	2.74 m	2.74 m	2.74 m	2.74 m	2.74 m
G. Ground Clearance	0.30 m	0.30 m	0.30 m	0.30 m	0.30 m	0.30 m
Gross Vehicle Weight*	6,800 kg	6,800 kg	6,800 kg	6,800 kg	6,900 kg	6,900 kg
Drive Speed	4.8 km/h	4.8 km/h	4.8 km/h	4.8 km/h	4.8 km/h	4.8 km/h
Gradeability	30%	30%	30%	30%	30%	30%
Tyres (pneumatic/non-marking)	36/14LL-22.5	36/14LL-22.5	36/14LL-22.5	36/14LL-22.5	36/14LL-22.5	36/14LL-22.5
Axle Oscillation (optional)	0.20 m	0.20 m	0.20 m	0.20 m	0.20 m	0.20 m
Turning Radius – Inside	1.22 m	1.22 m	1.22 m	1.22 m	1.22 m	1.22 m
Turning Radius – Outside	4.72 m	4.72 m	4.72 m	4.72 m	4.72 m	4.72 m
Electrical System	48V DC	48V DC	48V DC	48V DC	48V DC	48V DC
Batteries	8 x 6V 415 A/hr	8 x 6V 415 A/hr	8 x 6V 415 A/hr	8 x 6V 415 A/hr	8 x 6V 415 A/hr	8 x 6V 415 A/hr
Drive Motors	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction	Dual Electric Traction
Brakes	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied	Automatic Spring Applied
Hydraulic Pump Motor	Perm. Magnet	Perm. Magnet	Perm. Magnet	Perm. Magnet	Perm. Magnet	Perm. Magnet
Hydraulic Pump	Gear Pump	Gear Pump	Gear Pump	Gear Pump	Gear Pump	Gear Pump
Hydraulic Reservoir	55 L	55 L	55 L	55 L	55 L	55 L
Generator Set - Fully Automatic	—	Yanmar Air-cooled 4.5 kW	—	Yanmar Air-cooled 4.5 kW	—	Yanmar Air-cooled 4.5 kW
Generator Fuel Tank	—	50 L	—	50 L	—	50 L

*Certain options or country standards will increase weight.

Specifications may change to meet country standards or with the addition of optional equipment.

JLG MODELS E600 & M600

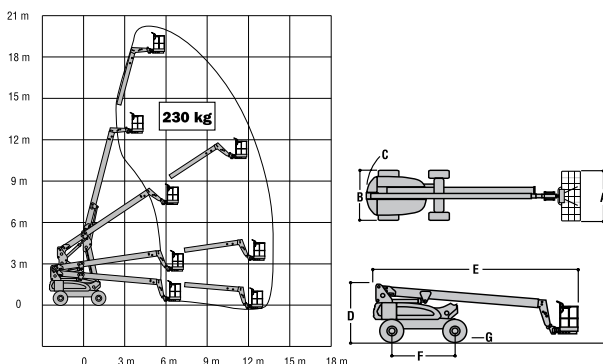

JLG MODELS E600J, M600J, E600JP & M600JP

