

# nifty

# 120T

## TRAILER MOUNTED ACCESS PLATFORM



**12.20m (40ft)**  
Working height

**6.10m (20ft 1in)**  
Working outreach

**Telescopic Upper Boom**  
Greater accuracy when  
positioning platform

**Bi-Energy Available**  
Optimising utilisation

**Hydraulic Outriggers**  
For quick & easy setup

**Fully Proportional  
Hydraulic Controls**  
Simple, reliable &  
easy to maintain

**Telescopic Axles**  
Access through double  
doorway openings



[niftylift.com](http://niftylift.com)



# nifty 120T

Designed specifically to give maximum performance from the most compact chassis possible, the **Nifty 120T** utilises its versatile telescopic boom to deliver unrivalled working outreach. Hydraulically operated outriggers make setting up quick and easy and the telescopic axles coupled with its compact base make this one of the most manoeuvrable trailer mounts available.

## SAFETY FEATURES


- Outriggers with Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked



The telescopic boom provides outstanding working outreach especially at lower levels where it's needed most.



Also available on low pressure, rough terrain tracks (**TD120T**).

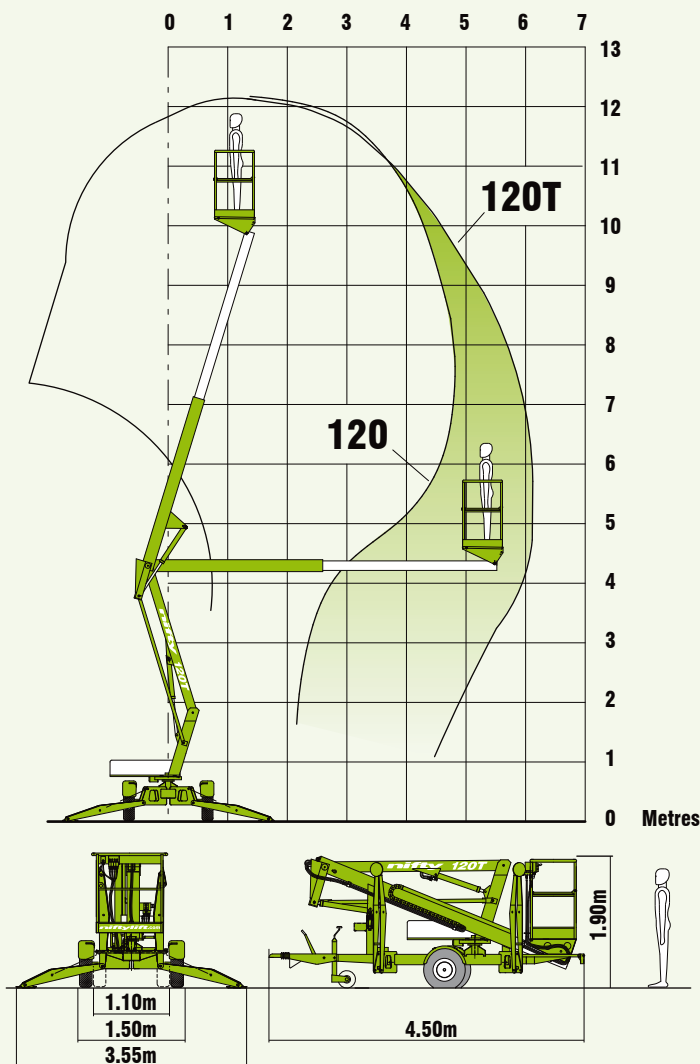

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

## SPECIFICATIONS

<b>Working Height</b>	12.20m	40ft
<b>Platform Height</b>	10.20m	33ft 6in
<b>Working Outreach</b>	6.10m	20ft 1in
<b>Slew</b>	360°	
<b>Width - Travelling</b>	1.50m	4ft 11in
<b>- Working</b>	3.55m	11ft 8in
<b>- Axles Retracted*</b>	1.10m	3ft 6in
<b>Height</b>	1.90m	6ft 3in
<b>Length</b>	4.50m	14ft 9in
<b>Weight</b>	1,400kg**	3,080lbs**
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 8in x 2ft 1in
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only Petrol or Diesel Only Bi-Energy (Engine & Battery)	
<b>Drive Options</b>	Traction Drive	

\* Traction drive axles do not retract.

\*\* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:



T: 01332 856 359 F: 01332 810 769  
E: info@workplatformltd.co.uk W: www.workplatformltd.co.uk

IS-04

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England

www.niftylift.com

e-mail: info@niftylift.com  
Tel.: +44 (0) 1908 223456  
Fax.: +44 (0) 1908 312733