

nifty

210

TRAILER MOUNTED ACCESS PLATFORM



21.00m (69ft)
Working height

12.15m (39ft 10in)
Working outreach

Platform Rotation
Better platform positioning

Unrestricted Outreach
225kg capacity at max outreach

**Fully Proportional
Hydraulic Controls**
Simple, reliable & easy to maintain

Hydraulic Outriggers
For quick and easy setup

Bi-Energy Available
Optimising utilisation

Traction Drive Option
Driven from the platform for easy
manoeuvrability on site



niftylift.com




nifty 210

The **Nifty 210** has one of the largest unrestricted working envelopes in its class. Hydraulic outriggers make it quick and easy to set up and an optional traction drive system, operated from the platform, allows the **210** to be positioned on site with minimal effort. Platform rotation provides greater manoeuvrability in the air and its fully proportional controls give the operator precise control when positioning the platform, even on hard to reach jobs.

SAFETY FEATURES

- Outriggers with Audible and Visible Alarms
- Double Acting Cylinders
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- CE Marked

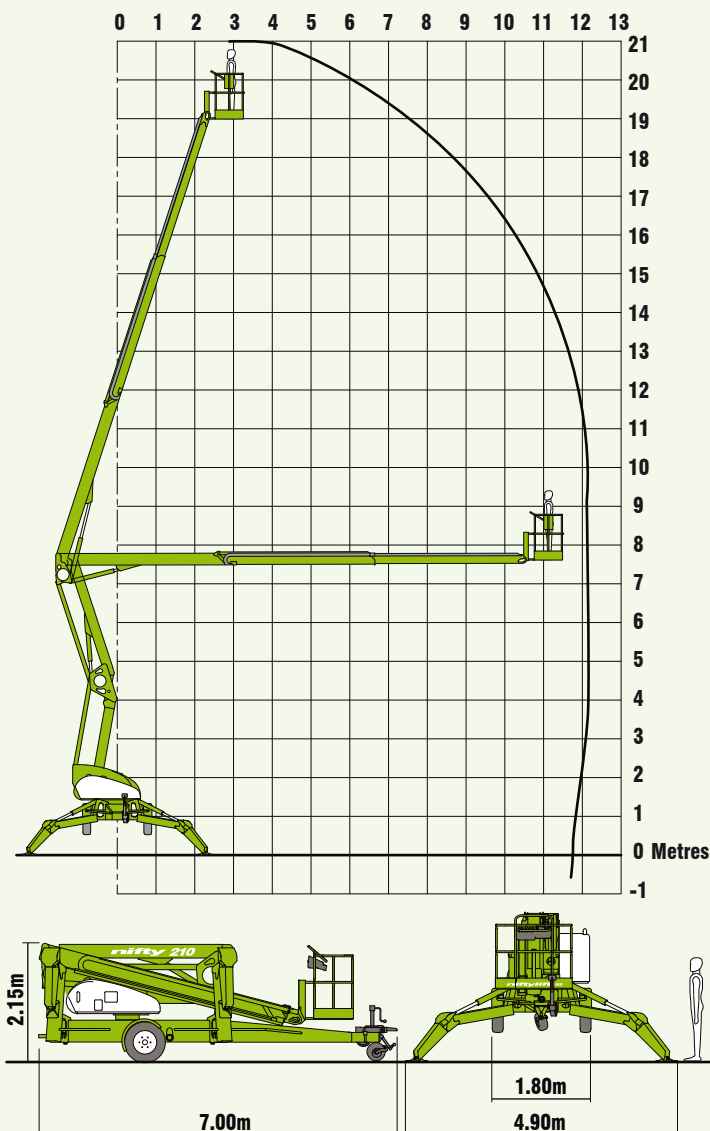

The **210's** special boom design makes it ideal for working near walls or buildings. A single control allows its platform to move vertically while remaining parallel to the job, saving time and improving efficiency.

SPECIFICATIONS

Working Height	21.00m	69ft
Platform Height	19.00m	62ft 5in
Working Outreach	12.15m	39ft 10in
Slew	360°	
Width - Travelling	1.80m	5ft 10in
- Working	4.90m	16ft 1in
Height	2.12m	6ft 11in
Length	7.00m	22ft 10in
Weight	3,300kg*	7,300lbs*
Platform Rotation	100°	
Platform Capacity	225kg	500lbs
Platform Size	1.40m x 0.70m	4ft 7in x 2ft 4in
Control System	Fully Proportional Hydraulic	
Power System	Mains Only	
	Diesel Only	
	Bi-Energy (Engine & Mains)	
Drive Option	Traction Drive	

* Weights may vary according to specification / power options, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:



T: 01332 856 359 F: 01332 810 769

E: info@workplatformltd.co.uk W: www.workplatformltd.co.uk

IS-03

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e-mail: info@niftylift.com
Tel.: +44 (0) 1908 223456
Fax.: +44 (0) 1908 312733