

PROVEN HYBRID TECHNOLOGY

IMPROVE YOUR BOTTOM LINE WITH THE GENIE® S®-60 FE



+10%
UTILIZATION RATE

+10%
RENTAL RATES

-10%
TOTAL COST OF OWNERSHIP

KEY FEATURES



Real 4WD
Capabilities



In/Out
Performance



Lightweight



IP-67
AC Drive Motors



Less Moving Parts
& Inspection Cycles



DPF-Free
Engine


Genie®

QUALITY BY DESIGN

LEARN MORE AT [GENIELIFT.COM](https://www.genielift.com)

GENIE® S®-BOOM FAMILY

MODEL	WORKING HEIGHT		PLATFORM HEIGHT		HORIZONTAL REACH		BELOW GROUND REACH		LIFT CAPACITY*		WEIGHT**	
	US	METRIC	US	METRIC	US	METRIC	US	METRIC	US	METRIC	US	METRIC
S®-40 XC™ ¹	45 ft 6 in	14.04 m	39 ft 6 in	12.04 m	31 ft 1 in	9.47 m	1 ft	0.30 m	660/1000 lb	300/454 kg	14,124 lb	6,407 kg
S-40 TraX™ ¹	45 ft 6 in	14.04 m	39 ft 6 in	12.04 m	31 ft 1 in	9.47 m	1 ft	0.30 m	660/1000 lb	300/454 kg	15,364 lb	6,969 kg
S-40 HF ²	45 ft 6 in	13.87 m	39 ft 6 in	12.04 m	28 ft 11 in	8.81 m	1 ft	0.30 m	600 lb	272 kg	13,544 lb	6,143 kg
S-45 XC™	50 ft 6 in	15.56 m	44 ft 6 in	13.56 m	36 ft 2 in	11.02 m	4 ft 2 in	1.27 m	660/1000 lb	300/454 kg	16,300 lb	7,394 kg
S-45 TraX™	50 ft 6 in	15.56 m	44 ft 6 in	13.56 m	36 ft 2 in	11.02 m	4 ft 2 in	1.27 m	660/1000 lb	300/454 kg	17,540 lb	7,956 kg
S-45 HF ¹	50 ft 6 in	15.56 m	44 ft 6 in	13.56 m	34 ft	10.36 m	4 ft 2 in	1.27 m	600 lb	272 kg	15,720 lb	7,130 kg
S-60 DC	67 ft 2 in	20.60 m	61 ft 2 in	18.60 m	40 ft 6 in	12.30 m	0 ft	0 m	660 lb	300 kg	17,600 lb	7,983 kg
S-60 FE	67 ft 2 in	20.60 m	61 ft 2 in	18.60 m	40 ft 6 in	12.30 m	0 ft	0 m	660 lb	300 kg	17,750 lb	8,051 kg
S-60 J	66 ft 10 in	20.50 m	60 ft 10 in	18.50 m	40 ft 6 in	12.30 m	0 ft	0 m	660 lb	300 kg	16,650 lb	7,550 kg
S-60 XC ¹	66 ft	20.29 m	60 ft	18.29 m	48 ft 7 in	14.80 m	5 ft 5 in	1.65 m	660/1000 lb	300/454 kg	22,930 lb	10,401 kg
S-60 TraX ¹	66 ft	20.29 m	60 ft	18.29 m	48 ft 7 in	14.80 m	5 ft 5 in	1.65 m	660/1000 lb	300/454 kg	26,840 lb	12,174 kg
S-60 HF ²	66 ft 2 in	20.33 m	60 ft 2 in	18.33 m	46 ft 7 in	14.21 m	4 ft 5 in	1.34 m	600/1000 lb	272/454 kg	22,224 lb	10,081 kg
S-65 XC	71 ft	21.81 m	65 ft	19.81 m	54 ft 2 in	16.51 m	8 ft 8 in	2.65 m	660/1000 lb	300/454 kg	25,160 lb	11,412 kg
S-65 TraX	71 ft	21.81 m	65 ft	19.81 m	54 ft 2 in	16.51 m	8 ft 8 in	2.65 m	660/1000 lb	300/454 kg	29,000 lb	13,154 kg
S-65 HF ²	71 ft 2 in	21.86 m	65 ft 2 in	19.86 m	51 ft 2 in	15.60 m	7 ft 5 in	2.27 m	600/1000 lb	272/454 kg	24,454 lb	11,092 kg
S-80 J	86 ft 5 in	26.51 m	80 ft 5 in	24.51 m	54 ft 9 in	16.69 m	0 ft	0 m	660 lb	300 kg	24,500 lb	11,113 kg
S-80 J TraX	86 ft 5 in	26.51 m	80 ft 5 in	24.51 m	54 ft 9 in	16.69 m	0 ft	0 m	660 lb	300 kg	28,700 lb	13,018 kg
S-80 XC ¹	86 ft	26.38 m	80 ft	24.38 m	68 ft 6 in	20.88 m	5 ft 6 in	1.68 m	660/1000 lb	300/454 kg	37,000 lb	16,783 kg
S-80 HF ²	86 ft	26.38 m	80 ft	24.38 m	68 ft 6 in	20.88 m	5 ft 6 in	1.68 m	600/1000 lb	272/454 kg	35,500 lb	16,103 kg
S-85 XC	91 ft	27.91 m	85 ft	25.91 m	74 ft 6 in	22.71 m	8 ft 8 in	2.64 m	660/1000 lb	300/454 kg	39,500 lb	17,917 kg
S-85 HF ²	91 ft	27.91 m	85 ft	25.91 m	72 ft 6 in	22.10 m	8 ft 8 in	2.64 m	600/1000 lb	272/454 kg	38,000 lb	17,237 kg
SX™-105 XC ³	111 ft	34.00 m	105 ft	32.00 m	80 ft	24.38 m	8 ft 10 in	2.69 m	660/1000 lb	300/454 kg	42,549 lb	19,300 kg
SX-125 XC	131 ft	40.10 m	125 ft	38.10 m	80 ft	24.38 m	8 ft 10 in	2.69 m	660/1000 lb	300/454 kg	45,636 lb	20,700 kg
SX-135 XC	141 ft	43.15 m	135 ft	41.15 m	90 ft	27.43 m	19 ft 8 in	6.00 m	660/1000 lb	300/454 kg	47,500 lb	21,546 kg
SX-150	158 ft	48.33 m	152 ft	46.33 m	80 ft	24.38 m	2 ft	0.61 m	750 lb	340 kg	49,950 lb	22,657 kg
SX-180	186 ft	56.86 m	180 ft	54.86 m	80 ft	24.38 m	2 ft	0.61 m	750 lb	340 kg	55,000 lb	24,948 kg

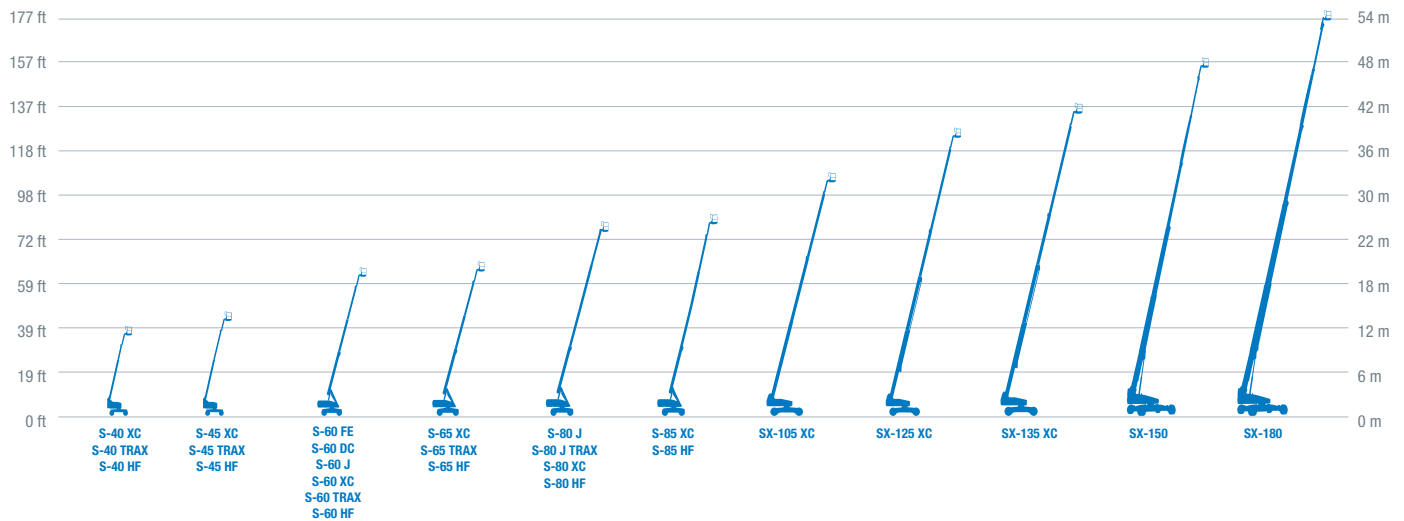

* When featuring two values, please read as Unrestricted/ Restricted lift capacity.

** Weight refers to standard configuration and may vary depending on options and/or country standards.

¹ Available in North America, Central America, South America, Japan and Brazil regions only

² Available in North America and Japan regions only

³ Available in all regions except North America

Genie®

QUALITY BY DESIGN

LEARN MORE AT GENIELIFT.COM