

Specifications

MODELS	GS™-2668 DC		GS™-3268 DC	
MEASUREMENTS	Metric	US	Metric	US
Working height maximum*	9.92 m	32 ft	11.75 m	38 ft
A Platform height	7.92 m	26 ft	9.75 m	32 ft
B Platform length - outside	2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
extended	3.61 m	11 ft 8 in	3.61 m	11 ft 8 in
Slide-out platform extension	1.10 m	3 ft 6 in	1.10 m	3 ft 6 in
C Platform width - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Toeboard height	15 cm	6 in	15 cm	6 in
Platform height - stowed	1.19 m	3 ft 10.75 in	1.31 m	4 ft 3.75 in
D Height - stowed	2.32 m	7 ft 5.5 in	2.57 m	8 ft 4 in
rails lowered	1.70 m	5 ft 7 in	1.83 m	6 ft
E Length - stowed	2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
platform extended	4.19 m	13 ft 9 in	4.19 m	13 ft 9 in
F Width	1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
G Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
H Ground clearance - centre	20 cm	8 in	20 cm	8 in

PRODUCTIVITY

Maximum platform occupancy (indoor/outdoor)	4/4	4/4	4/2	4/2
Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	4.8 km/h	3.0 mph	4.8 km/h	3.0 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability - stowed**	30%	30%	25%	25%
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 1 in	3.68 m	12 ft 1 in
Raise/lower speed	30/35 sec	30/35 sec	40/37 sec	40/37 sec
Controls	proportional		proportional	
Drive	dual rear wheel		dual rear wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - low profile foam filled turf	32 x 56 cm	12.5 x 22 in	32 x 56 cm	12.5 x 22 in
Tyres - non-marking	23 x 55 cm	9 x 21.5 in	23 x 55 cm	9 x 21.5 in

POWER




Power source	48 V DC (eight 225 Ah batteries)		48 V DC (eight 225 Ah batteries)	
Hydraulic system capacity	36 L	9.5 gal	36 L	9.5 gal

WEIGHT***

	3,125 kg	6,889 lbs	3,786 kg	8,346 lbs
CE max	3,153 kg	6,951 lbs	3,721 kg	8,203 lbs

STANDARDS COMPLIANCE

CE EN280, PB-10-611-03

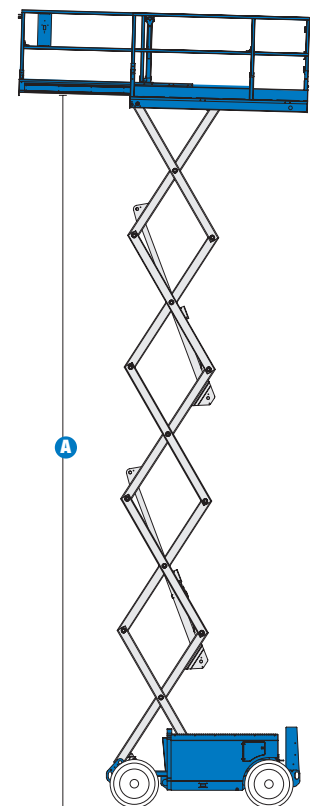

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight varies depending on options and country standards.

ERROR: undefined
OFFENDING COMMAND: get

STACK:

/0
-dictionary-
1